

Download

DXF 2D
- 620flag.dxf

Montaggi
- safety flag.pdf

BIM
- 620 - Safety Flag LED - Wall mounting - 20200528.zip
- 620 - Safety Flag LED - Suspension - 20200528.zip



620 - Safety Flag LED

Corps: En technopolymère

Réflecteur: En plexiglass transparent


équipement: Équipé de accessoires pour le fixation ou mur, ou plafond ou à suspension.

Version:

- Autonomie de 60 minutes se recharge automatiquement en 12 heures.

- Autonomie de 180 minutes se recharge automatiquement en 24 heures.

NORMES: appareils conformes aux normes EN60598-1 CEI 34-21 en vigueur et présentant l'indice de protection selon les normes EN60529.

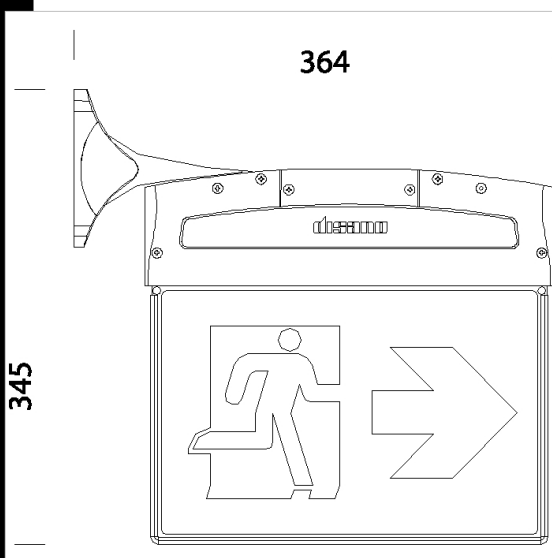

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
112581-00	CLD CEM-L	0,71	LED--6000K-	2 W	GRIGIO
112582-00	CLD CEM-L	0,83	LED--6000K-	2 W	GRIGIO

Accessori



- 470 étiquettes

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated