


Download

DXF 2D
- 1287.dxf
Montaggi
- garden.pdf



1280 Garden

Corps: En nylon f.v. stabilisé aux rayons UV.
Réflecteur: en aluminium spéculaire.
Diffuseur: en polycarbonate satiné à l'intérieur, anti-éblouissement, incassable et auto-extinction V2, stabilisé aux rayons UV.
Equipement: Système anti-arrachement en caoutchouc (câble min. Ø9 max Ø12). Vis en acier. Doté de plaque pour la fixation.
Norme: Produits conformes aux normes EN60598 - CEI 34 - 21. Indice de protection selon les normes EN60529.
Durée de vie 80%: 50000h (L80B20)

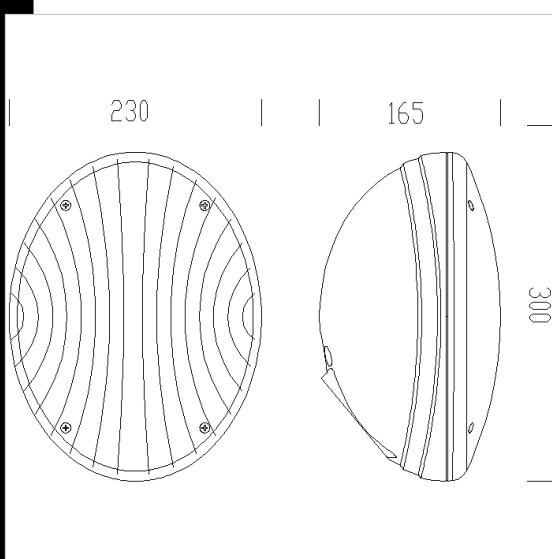

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
420845-00	CLD CELL	1,09	LED-1439lm-4000K-CRI 80	20 W	NOIR
420846-00	CLD CELL	1,08	LED-1439lm-4000K-CRI 80	20 W	GREY

Accessori



- 451 fixation mur/plafond



- 452 Fixation candélabre simple



- 453 Fixation candélabre double

Pali



- 5 poteau en fibre résine

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated