




1676 Spy

Corps : en aluminium moulé sous pression. Alimentation : avec ballast incorporé. LED : Maintien du flux lumineux à 70%: 25.000h (L70B50).

Download

DXF 2D
- 1676b.dxf

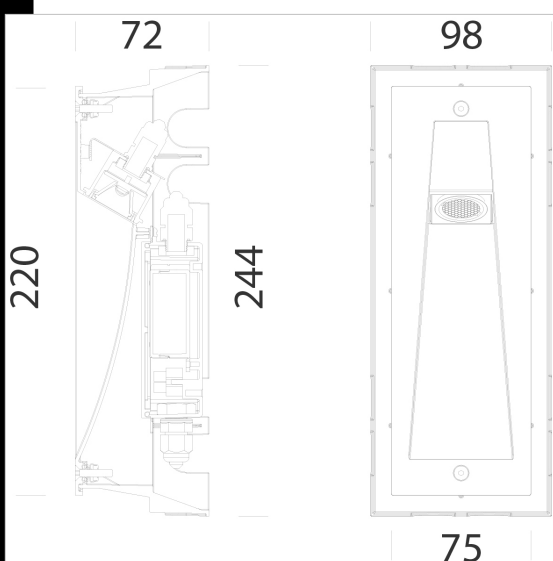

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
530683-00	CLD	0,41	LED-150lm-4000K-24°-CRI 80	1 W	GREY9007

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated