



Sintesi System - suspension - optique Dark - UGR<19

Sintesi System est le nouveau système linéaire Fosnova flanqué d'une esthétique sobre et élégante, disponible dans une grande variété d'optiques et de led. Il est facile à installer en suspension à éclairage direct et/ou direct-indirect, en plafonnier ou en ligne continue. Il est ainsi possible de donner à chaque projet d'éclairage le luminaire qui convient le mieux pour obtenir, par une utilisation rationnelle de la lumière, l'éclairement voulu. Corps : aluminium extrudé Alliage 6060. Capot supérieur en aluminium extrudé 6060 amovible pour la connexion au réseau d'alimentation électrique. Embouts : ABS V0 moulé par injection. LED : Maintien du flux lumineux à 80%: 50.000h (L80B20). Facteur de puissance 0,92.


Optique basse luminance : a ventelles double parabole, en aluminium brillant 99,99 anti-reflet et anti-irisant basse luminance avec traitement au PVD ou en aluminium brillant 99,85.

Normes: produits conformes aux normes EN 60598-1 CEI 34-21. Indice de protection conforme aux normes EN 60529.

Download

DXF 2D
- sintesisosp.dxf

Montaggi
- SINTESI-SYSTEM REV3.pdf

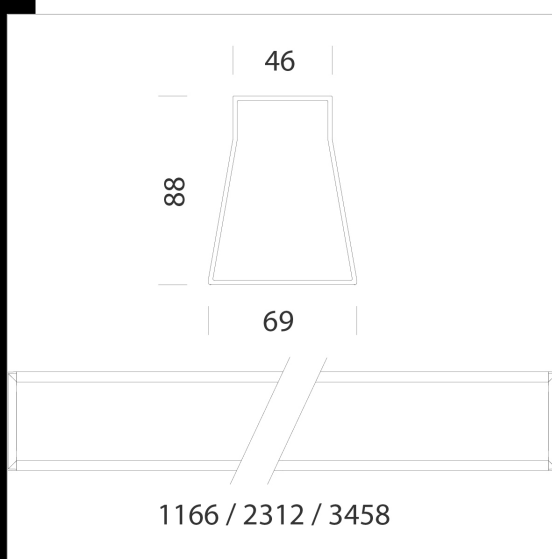

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22010013-00	CLD CELL	2,75	LED-2511lm-4000K-CRI 80	29 W	BLANC
22010013-1241	CLD CELL-D-D	2,87	LED-2511lm-4000K-CRI 80	29 W	BLANC
22010013-09	CLD CELL-E	3,69	LED-2511lm-4000K-CRI 80	29 W	BLANC
22010013-39	CLD CELL	2,75	LED-2335lm-3000K-CRI 80	29 W	BLANC
22010013-3941	CLD CELL-D-D	2,84	LED-2335lm-3000K-CRI 80	29 W	BLANC
22010013-0928	CLD CELL-E	0,00	LED-2335lm-3000K-CRI 80	29 W	BLANC
22010014-00	CLD CELL	5,39	LED-5022lm-4000K-CRI 80	56 W	BLANC
22010014-1241	CLD CELL-D-D	5,43	LED-5022lm-4000K-CRI 80	56 W	BLANC
22010014-09	CLD CELL-E	3,69	LED-5022lm-4000K-CRI 80	56 W	BLANC
22010014-31	CLD CELL-E	0,00	LED-5022lm-4000K-CRI 80	56 W	BLANC
22010014-39	CLD CELL	0,00	LED-4670lm-3000K-CRI 80	56 W	BLANC
22010014-3941	CLD CELL-D-D	5,43	LED-4670lm-3000K-CRI 80	56 W	BLANC
22010014-0928	CLD CELL-E	0,00	LED-4670lm-3000K-CRI 80	56 W	BLANC
22010014-3957	CLD CELL-E	0,00	LED-4670lm-3000K-CRI 80	56 W	BLANC
22010015-00	CLD CELL	7,92	LED-7533lm-4000K-CRI 80	81 W	BLANC
22010015-1241	CLD CELL-D-D	8,01	LED-7533lm-4000K-CRI 80	81 W	BLANC
22010015-09	CLD CELL-E	3,69	LED-7533lm-4000K-CRI 80	81 W	BLANC
22010015-31	CLD CELL-E	0,00	LED-7533lm-4000K-CRI 80	81 W	BLANC
22010015-39	CLD CELL	0,00	LED-7006lm-3000K-CRI 80	81 W	BLANC
22010015-3941	CLD CELL-D-D	0,00	LED-7006lm-3000K-CRI 80	81 W	BLANC
22010015-0928	CLD CELL-E	0,00	LED-7006lm-3000K-CRI 80	81 W	BLANC
22010015-3957	CLD CELL-E	0,00	LED-7006lm-3000K-CRI 80	81 W	BLANC

Accessori

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated



- Suspension simple



- Suspension simple



- Fixation suspension électrifiée



- Suspension simple Q



- Fixation suspension électrifiée Q



- Embout de fermeture 1 - Sintesi



- Sintesi Sensor - cellule de luminosité et/ou présence



- Sintesi Spot - UGR<22 - module lumineux

Accessori



- étrier de jonction - Sintesi



- Suspension with rods Q



- Powered suspension with rods Q

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated