




Sintesi System - suspensión - avec diffuseur UGR<19

Sintesi System est le nouveau système linéaire Fosnova flanqué d'une esthétique sobre et élégante, disponible dans une grande variété d'optiques et de led. Il est facile à installer en suspension à éclairage direct et/ou direct-indirect, en plafonnier ou en ligne continue. Il est ainsi possible de donner à chaque projet d'éclairage le luminaire qui convient le mieux pour obtenir, par une utilisation rationnelle de la lumière, l'éclairement voulu. Corps : aluminium extrudé Alliage 6060. Capot supérieur en aluminium extrudé 6060 amovible pour la connexion au réseau d'alimentation électrique. Embouts : ABS V0 moulé par injection. LED : Maintien du flux lumineux à 80%: 50.000h (L80B20). Facteur de puissance 0,92.

Diffuseur : PMMA transparent avec film micro-lenticulaire anti-éblouissement UGR<19.

Normes: produits conformes aux normes EN 60598-1 CEI 34-21. Indice de protection conforme aux normes EN 60529.

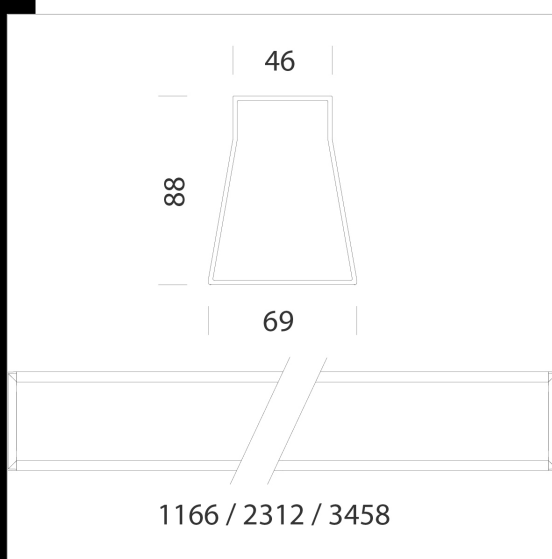

Download

DXF 2D
- sintesisosp.dxf

Montaggi
- SINTESI-SYSTEM REV3.pdf

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22010113-00	CLD CELL	3,29	LED-2547lm-4000K-CRI 80	29 W	BLANC
22010113-1241	CLD CELL-D-D	3,32	LED-2547lm-4000K-CRI 80	29 W	BLANC
22010113-09	CLD CELL-E	3,74	LED-2547lm-4000K-CRI 80	29 W	BLANC
22010113-39	CLD CELL	0,00	LED-2369lm-3000K-CRI 80	29 W	BLANC
22010113-3941	CLD CELL-D-D	0,00	LED-2369lm-3000K-CRI 80	29 W	BLANC
22010113-0928	CLD CELL-E	0,00	LED-2369lm-3000K-CRI 80	29 W	BLANC
22010114-00	CLD CELL	6,30	LED-5094lm-4000K-CRI 80	56 W	BLANC
22010114-1241	CLD CELL-D-D	6,37	LED-5094lm-4000K-CRI 80	56 W	BLANC
22010114-09	CLD CELL-E	6,82	LED-5094lm-4000K-CRI 80	56 W	BLANC
22010114-31	CLD CELL-E	0,00	LED-5094lm-4000K-CRI 80	56 W	BLANC
22010114-39	CLD CELL	0,00	LED-4737lm-3000K-CRI 80	56 W	BLANC
22010114-3941	CLD CELL-D-D	6,40	LED-4737lm-3000K-CRI 80	56 W	BLANC
22010114-0928	CLD CELL-E	0,00	LED-4737lm-3000K-CRI 80	56 W	BLANC
22010114-3957	CLD CELL-E	0,00	LED-4737lm-3000K-CRI 80	56 W	BLANC
22010115-00	CLD CELL	9,41	LED-7641lm-4000K-CRI 80	81 W	BLANC
22010115-1241	CLD CELL-D-D	9,38	LED-7641lm-4000K-CRI 80	81 W	BLANC
22010115-09	CLD CELL-E	3,69	LED-7641lm-4000K-CRI 80	81 W	BLANC
22010115-31	CLD CELL-E	0,00	LED-12530lm nominal flux-4000K-CRI 80	81 W	BLANC
22010115-39	CLD CELL	0,00	LED-7106lm-3000K-CRI 80	81 W	BLANC
22010115-3941	CLD CELL-D-D	9,51	LED-7106lm-4000K-CRI 80	81 W	BLANC
22010115-0928	CLD CELL-E	0,00	LED-7106lm-3000K-CRI 80	81 W	BLANC
22010115-3957	CLD CELL-E	0,00	LED-7106lm-3000K-CRI 80	81 W	BLANC

Accessori

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated



- Suspension simple



- Suspension simple



- Fixation suspension électrifiée



- Suspension simple Q



- Fixation suspension électrifiée Q



- Embout de fermeture 1 - Sintesi



- Sintesi Sensor - cellule de luminosité et/ou présence



- Sintesi Spot - UGR<22 - module lumineux

Sintesi System - suspensión - avec diffuseur UGR<19

Accessori



- étrier de jonction - Sintesi



- Suspension with rods Q



- Powered suspension with rods Q

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated