

## Download


DXF 2D  
- tortuga.dxf

Montaggi  
- TORTUGA rev5.pdf



## Tortuga Em SA - 220/240V

Corps : en polycarbonate incassable et auto-extinguible. Réflecteur : en polycarbonate, antiéblouissement, incassable et auto-extinguible.  
EM version: 3h.  
Appareils conformes aux normes EN 60598 CEI 34-21. Indice de protection conforme aux normes EN 60529.

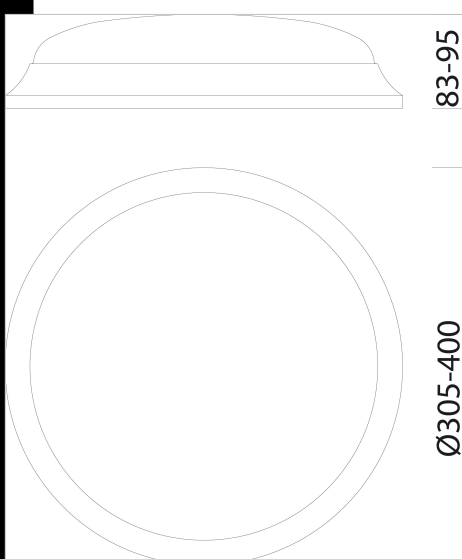

| Code        | Gear       | Kg   | Lumen Output-K-CRI      | WTot | Colour |
|-------------|------------|------|-------------------------|------|--------|
| 22042410-09 | CLD CELL-E | 0,96 | LED-1368lm-3000K-CRI>80 | 18 W | BLANC  |
| 22042411-09 | CLD CELL-E | 0,98 | LED-1488lm-4000K-CRI>80 | 18 W | BLANC  |
| 22042412-09 | CLD CELL-E | 1,50 | LED-2403lm-3000K-CRI>80 | 28 W | BLANC  |
| 22042413-09 | CLD CELL-E | 1,50 | LED-2614lm-4000K-CRI>80 | 30 W | BLANC  |

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated