

Download

DXF 2D
- trim111a1.dxf

Montaggi
- TRIMLESS-A 50-70-111 rev3.pdf



Trimless 111 - A1


Corps : en aluminium moulé sous pression avec projecteurs orientables et inclinables. Equipement : équipés d'étriers en acier galvanisé qui assurent une adhérence parfaite aux faux-plafonds d'épaisseur comprise entre 12 mm et 25 mm. Réflecteur : en polycarbonate métallisé haut rendement. Normes: produits conformes aux normes EN 60598-1 CEI 34-21. Indice de protection conforme aux normes EN 60529.

LED: Sources lumineuses haute efficacité (CRI 90).

Facteur de puissance: $\geq 0,95$

Groupe de risque photobiologique : Groupe 0 (exempt de risque).

Maintien du flux lumineux à 80%: 50.000h (L80B20).
encastrée Ø 156x156mm

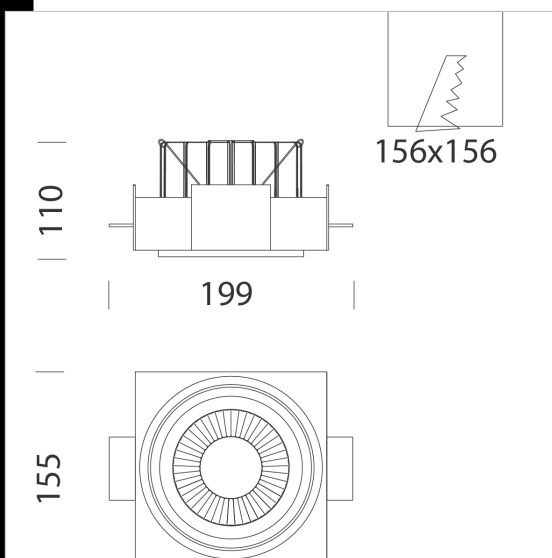

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22111130-00	CLD CELL	1,70	LED COB-3089lm-3000K-15°-CRI 90	38 W	NOIR
22111130-1241	CLD CELL-D-D	1,70	LED COB-3089lm-3000K-15°-CRI 90	38 W	NOIR
22111131-00	CLD CELL	1,70	LED COB-3322lm-4000K-15°-CRI 90	38 W	NOIR
22111131-1241	CLD CELL-D-D	1,70	LED COB-3322lm-4000K-15°-CRI 90	38 W	NOIR
22111132-00	CLD CELL	1,48	LED COB-3029lm-3000K-25°-CRI 90	38 W	NOIR
22111132-1241	CLD CELL-D-D	1,70	LED COB-3029lm-3000K-25°-CRI 90	38 W	NOIR
22111133-00	CLD CELL	1,70	LED COB-3257lm-4000K-25°-CRI 90	38 W	NOIR
22111133-1241	CLD CELL-D-D	1,70	LED COB-3257lm-4000K-25°-CRI 90	38 W	NOIR
22111134-00	CLD CELL	1,47	LED COB-2988lm-3000K-40°-CRI 90	38 W	NOIR
22111134-1241	CLD CELL-D-D	1,70	LED COB-2988lm-3000K-40°-CRI 90	38 W	NOIR
22111135-00	CLD CELL	1,70	LED COB-3213lm-4000K-40°-CRI 90	38 W	NOIR
22111135-1241	CLD CELL-D-D	1,70	LED COB-3213lm-4000K-40°-CRI 90	38 W	NOIR

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated