

Trimless 111 - B2

Corps : en aluminium moulé sous pression avec projecteurs orientables et inclinables. Equipement : équipés d'étriers en acier galvanisé qui assurent une adhérence parfaite aux faux-plafonds d'épaisseur comprise entre 12 mm et 25 mm. Réflecteur : en polycarbonate métallisé haut rendement. Normes: produits conformes aux normes EN 60598-1 CEI 34-21. Indice de protection conforme aux normes EN 60529.

LED: Sources lumineuses haute efficacité (CRI 90).

Facteur de puissance: $\geq 0,95$

Groupe de risque photobiologique : Groupe 0 (exempt de risque).


Maintien du flux lumineux à 80%: 50.000h (L80B20).

encastrée Ø 315x168mm

Download

DXF 2D
- trim111b2.dxf

Montaggi
- TRIMLESS-B_50-70-111 rev3.pdf

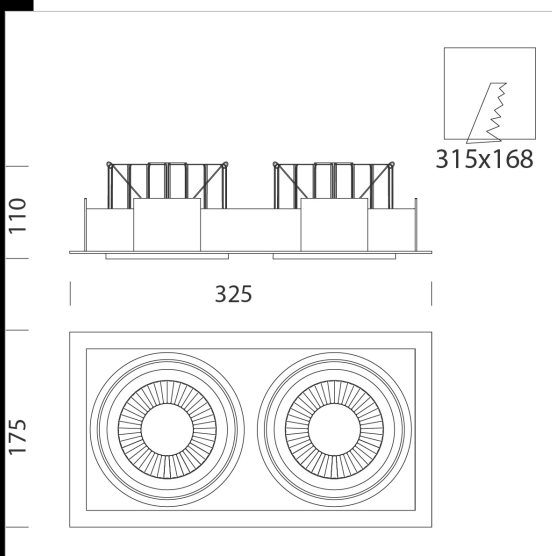

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22111210-00	CLD CELL	1,70	LED COB2x-3089lm-3000K-15°-CRI 90	76 W	BLANC
22111210-1241	CLD CELLDD	1,70	LED COB2x-3089lm-3000K-15°-CRI 90	80 W	BLANC
22111211-00	CLD CELL	1,70	LED COB2x-3322lm-4000K-15°-CRI 90	76 W	BLANC
22111211-1241	CLD CELLDD	1,70	LED COB2x-3322lm-4000K-15°-CRI 90	80 W	BLANC
22111212-00	CLD CELL	1,70	LED COB2x-3029lm-3000K-25°-CRI 90	76 W	BLANC
22111212-1241	CLD CELLDD	1,70	LED COB2x-3029lm-3000K-25°-CRI 90	80 W	BLANC
22111213-00	CLD CELL	1,70	LED COB2x-3257lm-4000K-25°-CRI 90	76 W	BLANC
22111213-1241	CLD CELLDD	1,70	LED COB2x-3257lm-4000K-25°-CRI 90	80 W	BLANC
22111214-00	CLD CELL	3,11	LED COB2x-2988lm-3000K-40°-CRI 90	76 W	BLANC
22111214-1241	CLD CELLDD	1,70	LED COB2x-2988lm-3000K-40°-CRI 90	80 W	BLANC
22111215-00	CLD CELL	3,10	LED COB2x-3213lm-4000K-40°-CRI 90	76 W	BLANC
22111215-1241	CLD CELLDD	1,70	LED COB2x-3213lm-4000K-40°-CRI 90	80 W	BLANC

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated