

Download


DXF 2D
- sevilla1.dxf

Montaggi
- SEVILLA_1-2-3 rev0.pdf



Sevilla 1 - 220/240V

Corps : aluminium moulé sous pression. Diffuseur : verre trempé transparent épaisseur 4 mm résistant au choc thermique et au choc mécanique. Équipement : étrier galvanisé et peint. Câble d'alimentation L = 0,6m. LED: facteur de puissance : 0,9. Maintien du flux lumineux à 80%: 50.000h (L80B20). Groupe de risque photobiologique: groupe 0 (exempt de risque).

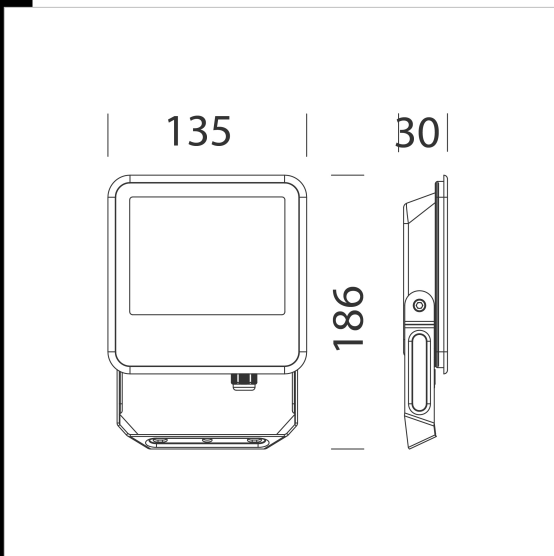

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22413331-00	CLD CELL	0,38	LED-2100lm-3000K-CRI 70	20 W	GRAPHITE
22413332-00	CLD CELL	0,38	LED-2200lm-4000K-CRI 70	20 W	GRAPHITE
22413333-00	CLD CELL	0,38	LED-2200lm-6500K-CRI 70	20 W	GRAPHITE
22413331-19	CLD CELL	0,37	LED-2100lm-3000K-CRI 70	20 W	GRAPHITE
22413332-19	CLD CELL	0,38	LED-2200lm-4000K-CRI 70	20 W	GRAPHITE
22413333-19	CLD CELL	0,38	LED-2200lm-6500K-CRI 70	20 W	GRAPHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated